


UR FOG

The fastest fogging security systems



CATALOGUE 2020

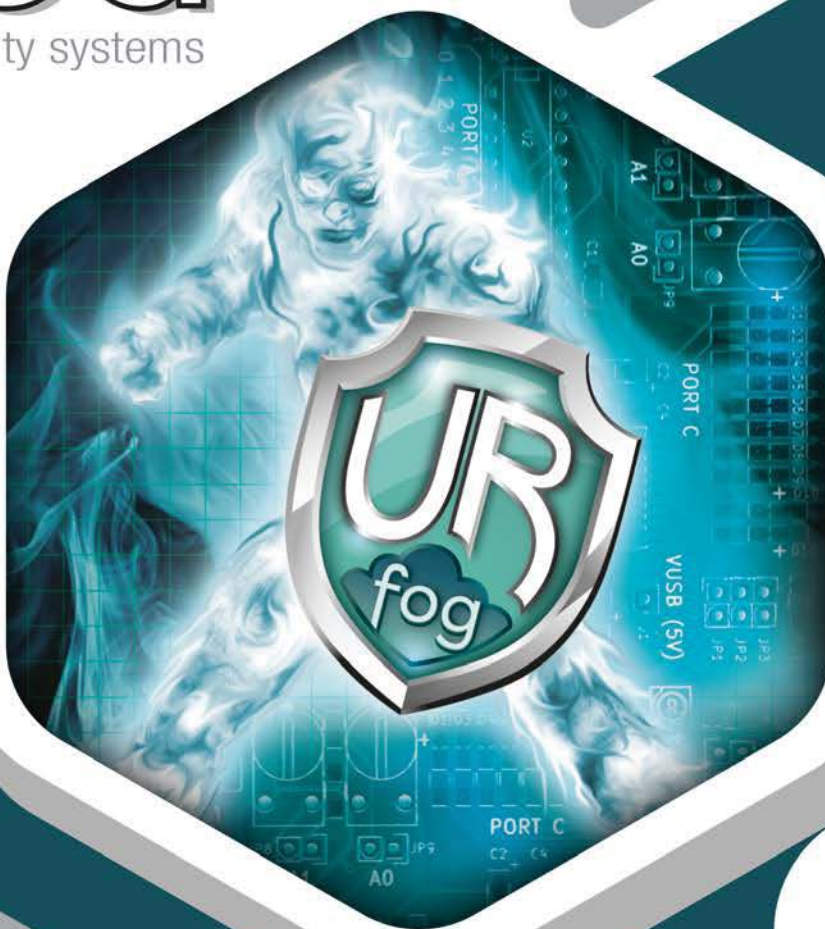

WHY FOGGING SYSTEMS ARE NEEDED?

WHY ARE FOGGING SYSTEMS NEEDED?

All traditional alarm systems on the market (siren, CCTV, call to the Police, etc.) are able to inform you about a theft while it's happening, they can record it, but they absolutely cannot avoid it.

As a matter of fact, it takes about 10 minutes for the authorities to arrive at the place where the burglary took place (receiving the call, assigning the job to the closest patrol, driving time).

The thieves need less than **3 minutes** to act, that is why it is essential to prevent the burglars, until the authorities get to the site, from entering the place.

The only anti-intrusion tools on the market are the fogging systems, security devices that discharge atoxic fog (made from glycol) that doesn't leave residuals and is completely harmless for both humans and animals.

The emitted fog is able to create, in just a few seconds, a concrete and impenetrable barrier to protect the area in which the device is installed (shops, offices, medical practices, warehouses, firms, houses, garages, etc.).

The Fogging System can be connected to any alarm system on the market and activates (discharges fog) thanks to the anti-theft sensors when a break-in is detected.

WHY TO CHOOSE UR FOG?

- The fastest in fog emission
- The densest fog, thanks to the fog fluid with just 10% of water in its formula
- Low power consumption during activation and maintaining thanks to the 170W, 300W and 600W heaters.
- Different patented technologies such as the nozzle anti-tamper, the layer heating system and the Fog Storm pump and other innovations, like orientable nozzle, fuse cable.
- Bus expansion for add-on boards and standard protocol
- Compliant with European regulations and fog fluid certified as not dangerous for people, animals and electronics
- Wide product range: pump, single or double cylinder technology.
- Price aggressive recharges
- All main components are internally developed by our own R&D department and designed to be exchangeable
- Cheap solutions with nice design for high volumes and easy OEM developments





TARGETS



TELCO SHOPS / SHELTERS

Telecommunication shelters and shops are primary targets for fogging systems



GARAGES

The smartest and cheapest solution to keep your belongings safe



SUPERMARKETS

Solutions for any needs and dimensions



CAMPERS-CARAVANS-BOATS

The unique battery operated fog solution



JEWELLERIES

The most effective answer to preserve your jeweler store



HOMES/OFFICES

Grant the safest protection to your family even while you are at home



WAREHOUSES

Protect up to 4000 m³ with only one fogging system



VALUE TRANSPORTS

Battery operated proposal for high risk protection



MONEY EXCHANGE

Example of anti robbery application and night protection



GAMBLING MACHINES

One of the most stroked target – we grant a wide range of solutions – they can also be integrated to the gambling machine



SAFES

Safe rooms and areas where a safe is installed can be easily safeguarded



BUSINESS PREMISES

The best solution to safeguard your business property



ATM / BANKS

Choose between embedded battery operated machine or standard fogging systems





PETROL STATIONS

Our fog fluid is certified as not dangerous for people and animals – outdoor and indoor solutions



ROAD MAP 2019/2020

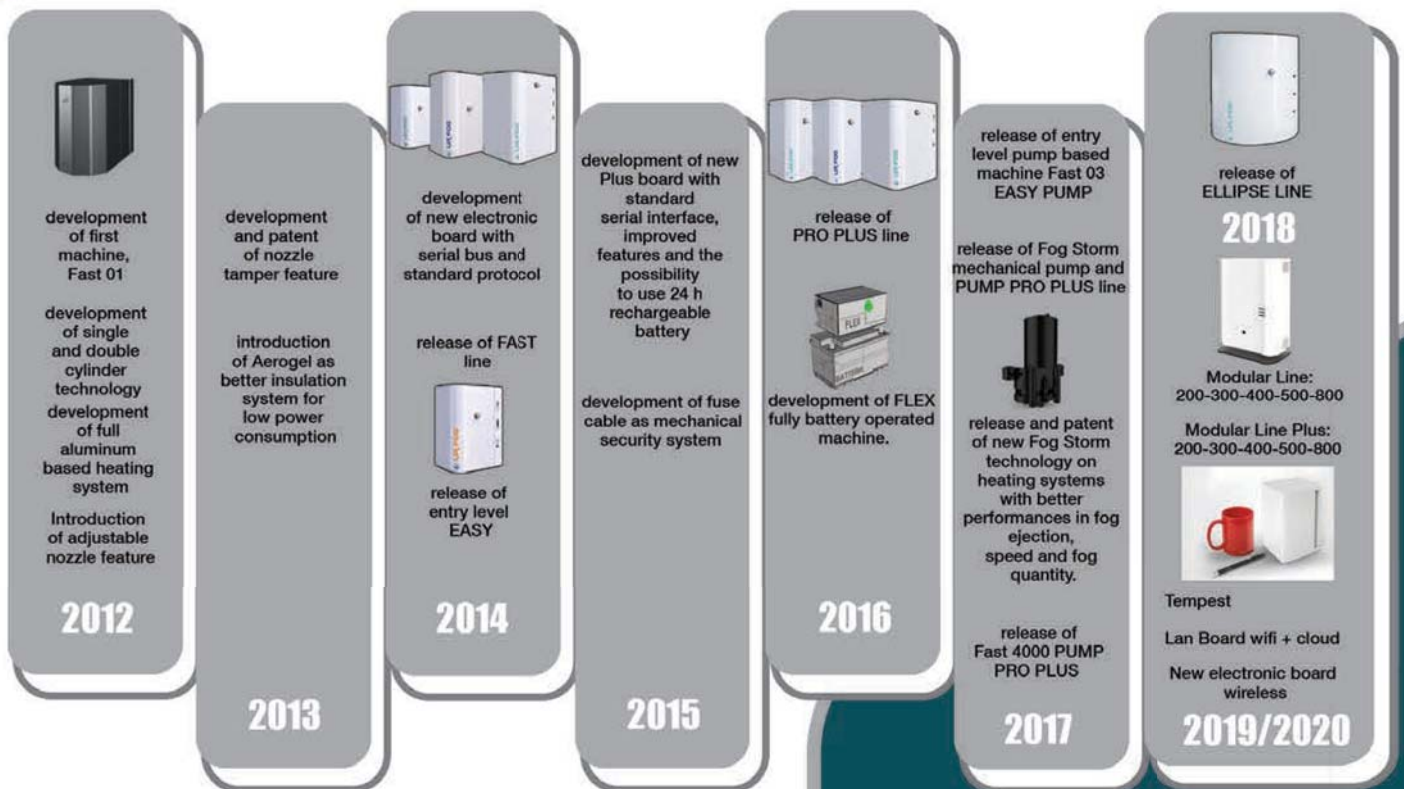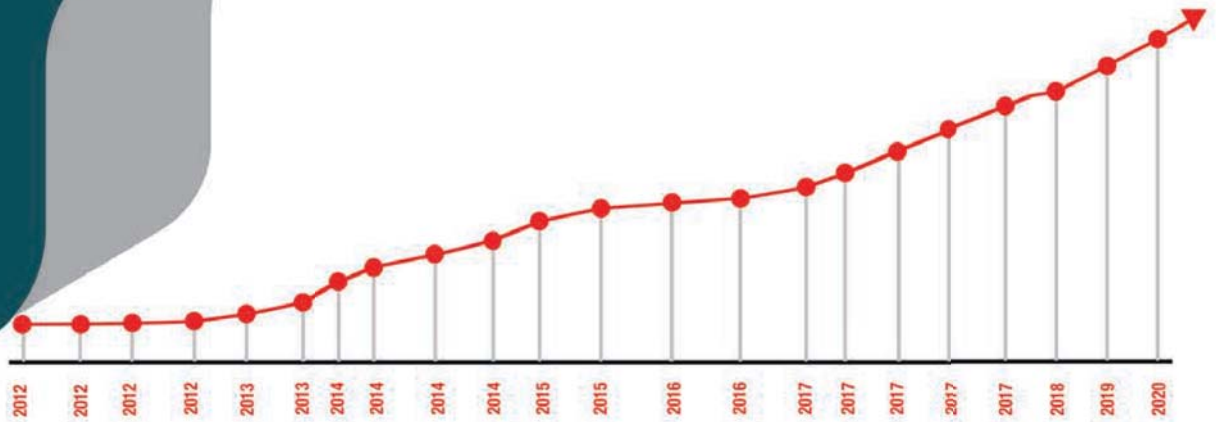

NEW FOG STORM; IT IS AN OUTSTANDING NEW MECHANICAL PUMP TECHNOLOGY, THE FASTEST AND MOST RELIABLE.

Easy to replace cylinders. Patented double cylinder system.



CERTIFICATIONS

UR FOG machines have been developed, thanks to the internal R&D team and laboratories, with innovative solutions for security and fully respecting international approvals and regulations.


The fog fluid is certified by EUROFINS, one of the largest multinational companies for chemical, cosmetic, medicine certification, as not toxic for humans and animals and the fluid content is not in contrast with any Islamic country regulation. Products have been already sold in over 80 worldwide countries.

eurofins	biolab	Test Facility	Report No.: 20121463 INC
			Page: 1 of 1
			Print Date: September 07, 2012
Final Report 20121463 INC			
TOXICOLOGICAL EVALUATION ON UR FOG CARTRIDGE			
Study ID/Project:	20121463 INC		
Contract ID:	PPH/2012020791		
Sample:	UR FOG 001 VIA QUANTO DOLLARON 11 TORINO TORINO		
Test Item:	UR FOG CARTRIDGE		
Study Director: (Print Name)	[Signature] <i>Dr. S. P. S.</i>		
This test report cannot be reproduced partially without a written approval of the Test Facility			
<p>Eurofins Biolab S.p.A. Via S. Maria della Pace, 11 00187 Roma (RM) Tel. +39 06 49411111 Fax +39 06 49411112 E-mail: info@eurofins.com Web: www.eurofins.com</p> <p>Via S. Maria della Pace, 11 00187 Roma (RM) Tel. +39 06 49411111 Fax +39 06 49411112 E-mail: info@eurofins.com Web: www.eurofins.com</p>			

Fogging machines have EMC - FCC - CE approvals and respect EN 50131-8 regulation.

<p>Laboratory GSD G.S.D. S.r.l. Via Marmicci, 8 - 50121 Ospedaletto (Pisa) Italy</p>		<p>CE MARKING Certified in accordance with UNI EN ISO 9001:2008 by TUV Rheinland Italia S.r.l. Certificate N. 39 00 1858049</p>
G.S.D. Srl PISA - Italy	Attestation of Conformity n. 16591-AC-F Rev. 02	
Manufacturer	UR FOG S.r.l.	
Address	Via Giacomo Collegno, 11 10143 TORINO Italy	
Product	FAST 03 2C PRO-F, FAST 01 2C-P	
Product Family	FAST 03 1C PRO-F, FAST 02 2C PRO-P	
Testing Laboratory Name	G.S.D. S.r.l.	
Address	Via Marmicci, 8 50121 Ospedaletto Pisa (PI) Italy	
Test specification	<p>EN 50131-8 (2009) - Security fog device/systems IEC 62442-2 (2011) - Security fog device/systems EN 50130-5 (2011) - Environmental test method EN 61000-6-3 (2007) - Electromagnetic compatibility (EMC) EN 50130-4 (2009) - Electromagnetic compatibility (EMC) EN 50131-1 (2006) - System requirements EN 60965 (2002) - Electrical Safety requirements Environmental Classification: Class II Test does not include on-site installation, service and maintenance</p>	
Ref. documents	GSD project n. 16591	
Comments and Conclusions	<p>During April 11 and May 21, 2010 we have performed test in accordance to the above listed and referenced standards.</p> <p>The test item has fulfilled all the requirements without remarks.</p> <p>The product comply with European standard according to the test specification.</p>	
Location and Date of Issue	Pisa, 2010 May, 23	
<p>G.S.D. S.r.l. Via Marmicci, 8 50121 OSPEDALETTO - PISA Tel. 050.366224 - Fax 050.366282 P. IVA 01343950503</p> <p>SENIOR TEST MANAGER Dr. S. P. S.</p> <p>QUALITY MANAGER Dr. S. P. S.</p>		

<p>CE MARKING Certified in accordance with UNI EN ISO 9001:2008 by TUV Rheinland Italia S.r.l. Certificate N. 39 00 1858049</p>	
Report n. 13288	
UR Fog S.r.l.	
Via Collegno, 11 10143 TORINO Italy	
FAST 02-03	
FAST 02	
<p>G.S.D. S.r.l. Via Marmicci, 8 50121 OSPEDALETTO - PISA Tel. 050.366224 - Fax 050.366282 P. IVA 01343950503</p> <p>TEST MANAGER Dr. S. P. S.</p> <p>QUALITY MANAGER Dr. S. P. S.</p>	
<p>G.S.D. S.r.l. Via Marmicci, 8 - 50121 Ospedaletto (Pisa) Italy Tel. +39 050 366224 - Fax +39 050 366282 http://www.gsd.it - e-mail: info@gsd.it P. IVA 01343950503</p> <p>This document may be only fully reproduced. Future partial reproduction is only allowed after written approval released by G.S.D. S.r.l.</p>	

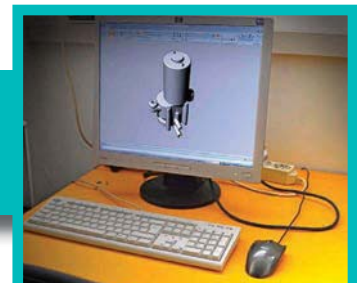



PRODUCT RANGE



FAST 03 EASY 2

Up to 200 m³ (recommended visibility)
One cylinder 300 ml included
Shot full cylinder in two times
Vertical installation
Adjustable nozzle
TWO INPUTS: arming, shooting
THREE OUTPUTS: empty cylinder, fault, anti-tampering door

m³ 200



FAST 03 1C

Up to 200 m³ (recommended visibility)
One cylinder 400 ml included
Shot programmable in seconds
Vertical/horizontal installation
Adjustable nozzle
TWO INPUTS: arming, shooting
THREE OUTPUTS: empty cylinder, fault, anti-tampering

m³ 200



FAST 03 2C

Up to 200 m³ (recommended visibility)
Two cylinders 400 ml included
Shot programmable in seconds
Vertical/horizontal installation
Adjustable nozzle
TWO INPUTS: arming, shooting
THREE OUTPUTS: empty cylinder, fault, anti-tampering

m³ 200



FAST 02 2C

Up to 400 m³ (recommended visibility)
Two cylinders 500 ml included
Shot programmable in seconds
Vertical/horizontal installation
Adjustable nozzle
TWO INPUTS: arming, shooting
THREE OUTPUTS: empty cylinder, fault, anti-tampering

m³ 400



FAST 01 2C

Up to 1200 m³ (recommended visibility)
Two cylinders 600 ml included
Shot programmable in seconds
Vertical/horizontal installation
Adjustable nozzle
TWO INPUTS: arming, shooting
THREE OUTPUTS: empty cylinder, fault, anti-tampering

m³ 1200



FAST 03 1C PRO PLUS

Up to 200 m³ (recommended visibility)
One cylinder 600 ml included
Shot programmable in seconds
Vertical/horizontal installation
THREE INPUTS: arming, shooting and PIR sensor validation
FOUR OUTPUTS: empty cylinder, fault, tamper, shot confirmation
Adjustable nozzle

m³ 200



FAST 03 2C PRO PLUS

Up to 200 m³ (recommended visibility)
Two cylinders 600 ml included
Shot programmable in seconds
Vertical/horizontal installation
THREE INPUTS: arming, shooting and PIR sensor validation
FOUR OUTPUTS: empty cylinder, fault, tamper, shot confirmation
Adjustable nozzle

m³ 200



FAST 02 2C PRO PLUS

Up to 400 m³ (recommended visibility)
Two cylinders 600 ml included
Shot programmable in seconds
Vertical/horizontal installation
THREE INPUTS: arming, shooting and PIR sensor validation
FOUR OUTPUTS: empty cylinder, fault, tamper, shot confirmation
Adjustable nozzle

m³ 400



FAST 01 2C PRO PLUS

Up to 1200 m³ (recommended visibility)
Two cylinders 600 ml included
Shot programmable in seconds
Vertical/horizontal installation
THREE INPUTS: arming, shooting and PIR sensor validation
FOUR OUTPUTS: empty cylinder, fault, tamper, shot confirmation
Adjustable nozzle

m³ 1200



FAST 250 PUMP PRO PLUS

m³ 250

Up to 250 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



FAST 500 PUMP PRO PLUS

m³ 500

Up to 500 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



FAST 1500 PUMP PRO PLUS

m³ 1500

Up to 1500 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



FAST 4000 PUMP PRO PLUS

m³ 4000

Up to 4000 m³ (recommended visibility)
 One bag 4000 ml included
 Shot programmable in seconds
 Vertical installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



FAST PUMP 250 SIMPLE

m³ 250

Up to 250 m³ (recommended visibility)
 One bag 1000 ml included
 Adjustable nozzle
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting, PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 ON/OFF KEY – SENSOR – REMOTE CONTROL – SIREN



FAST PUMP 500 SIMPLE

m³ 500

Up to 500 m³ (recommended visibility)
 One bag 1000 ml included
 Adjustable nozzle
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting, PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 ON/OFF KEY – SENSOR – REMOTE CONTROL – SIREN



FAST PUMP 1500 SIMPLE

m³ 1500

Up to 1500 m³ (recommended visibility)
 One bag 1000 ml included
 Adjustable nozzle
 Vertical installation
 THREE INPUTS: arming, shooting, PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 ON/OFF KEY – SENSOR – REMOTE CONTROL – SIREN



ELLIPSE 250 PUMP PRO PLUS

m³ 250

Up to 250 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



ELLIPSE 500 PUMP PRO PLUS

m³ 500

Up to 500 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 THREE INPUTS: arming, shooting and PIR sensor validation
 FOUR OUTPUTS: empty bag, fault, tamper, shot confirmation
 Adjustable nozzle



MODULAR 200

m³ 200

Up to 200 m³ (recommended visibility)
 One bag 500 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 2 WIRED INPUTS: ARMING AND SHOOTING
 1 WIRED OUTPUT: GENERIC FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE)



MODULAR 300

m³ 300

Up to 300 m³ (recommended visibility)
 One bag 500 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 2 WIRED INPUTS: ARMING AND SHOOTING
 1 WIRED OUTPUT: GENERIC FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE)



MODULAR 400

m³ 400

Up to 400 m³ (recommended visibility)
 One bag 750ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 2 WIRED INPUTS: ARMING AND SHOOTING
 1 WIRED OUTPUT: GENERIC FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE)



MODULAR 500

m³ 500

Up to 500 m³ (recommended visibility)
 One bag 750ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 2 WIRED INPUTS: ARMING AND SHOOTING
 1 WIRED OUTPUT: GENERIC FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE)



MODULAR 800

m³ 800

Up to 800 m³ (recommended visibility)
 One bag 1000 ml included
 Shot programmable in seconds
 Vertical/horizontal installation
 2 WIRED INPUTS: ARMING AND SHOOTING
 1 WIRED OUTPUT: GENERIC FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE)



MODULAR 200 C PLUS

m³ 200

Up to 200 m³ (recommended visibility)
 One 750 ml included bag
 Shot programmable in seconds
 Vertical/horizontal installation
 4 SERIAL SLOTS TO ADD EXPANSION BOARDS
 4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
 5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION



MODULAR 300 C PLUS

m³ 300

Up to 300 m³ (recommended visibility)
 One 750 ml included bag
 Shot programmable in seconds
 Vertical/horizontal installation
 4 SERIAL SLOTS TO ADD EXPANSION BOARDS
 4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
 5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION



MODULAR 400 C PLUS

m³ 400

Up to 400 m³ (recommended visibility)
 One 750 ml included bag
 Shot programmable in seconds
 Vertical/horizontal installation
 4 SERIAL SLOTS TO ADD EXPANSION BOARDS
 4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
 5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION



MODULAR 500 C PLUS

m³ 500

Up to 500 m³ (recommended visibility)
 One 750 ml included bag
 Shot programmable in seconds
 Vertical/horizontal installation
 4 SERIAL SLOTS TO ADD EXPANSION BOARDS
 4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
 5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION



MODULAR 800 C PLUS

m³ 800

Up to 800 m³ (recommended visibility)
 One 1000 ml included bag
 Shot programmable in seconds
 Vertical/horizontal installation
 4 SERIAL SLOTS TO ADD EXPANSION BOARDS
 4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
 5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION



TEMPEST

Up to 100 m³ (recommended visibility) in less than 60 seconds
 Single shot
 Vertical/horizontal installation
 Battery power supply
 Fog fluid tank
 2 inputs and 2 outputs
 Battery charger (opt)



ELECTRONIC BOARDS



FAST BOARD

Standard board for FAST line and Easy models, battery pack with 6 alkaline batteries.
2 Inputs
3 Outputs



PLUS BOARD

Plus board with additional PIR input and shooting confirmation output for PRO PLUS machines with 12 V power supply and 2 Ah battery.
3 Inputs
4 Outputs



TEMPEST BOARD

Board for battery powered fogging system with 2 inputs and 2 outputs.



MODULAR BOARD

Board for Modular line with:
-2 CABLED INPUTS: ARMING AND SHOOTING
-1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SYSTEM FAILURE).



MODULAR CPLUS BOARD

Board for Modular C Plus line with:
-4 SERIAL SLOTS TO ADD EXPANSION BOARDS
-4 WIRED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR)
-5 WIRED OUTPUTS TO THE RELAY: FAULT, CUSTOMABLE OUTPUT, EMPTY BAG, LOW BATTERY OR ABSENCE OF MAINS POWER AND SHOOTING CONFIRMATION

TECHNICAL LIST

FAST LINE

	FAST 03 EASY 2	FAST 03 IC	FAST 03 2C	FAST 02 2C	FAST 01 2C
MAX FOG EMISSION IN A SINGLE SHOT	200 m ³	200 m ³	200 m ³	400 m ³	1200 m ³
MAX SECONDS IN A SINGLE SHOT	15 sec	15 sec	15 sec	25 sec	70 sec
TOTAL EMISSION WITH FULL FOG TANKS	400 m ³	600 m ³	1200 m ³	1500 m ³	1800 m ³
CYLINDERS OR PUMP	1 CYLINDER	1 CYLINDER	2 CYLINDERS	2 CYLINDERS	2 CYLINDERS
FOG TANK CAPACITY	300 ml	400 ml	400 ml	500 ml	600 ml
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 H	ABOUT 2 H	ABOUT 2 H	ABOUT 2 H	OVER 2,5 H
HEATING TIME	ABOUT 70 min.	ABOUT 70 min.	ABOUT 70 min.	ABOUT 90 min.	ABOUT 2 H
VERTICAL/CORNER MOUNTING	BOTH	BOTH	BOTH	BOTH	VERTICAL
HORIZONTAL MOUNTING	NO	YES	YES	YES	OPT.
SERIAL PORT FOR BUS	YES	YES	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	37 W	37 W	42 W	60 W
BACK UP BATTERY	6 ALKALINE BATTERIES	6 ALKALINE BATTERIES	6 ALKALINE BATTERIES	6 ALKALINE BATTERIES	6 ALKALINE BATTERIES
ELECTRONIC BOARD	FAST	FAST	FAST	FAST	FAST
CABINET TYPE	FAST	FAST	FAST	FAST	FAST
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES	YES	YES
HEATER CARTDRIGE	300 W	300 W	300 W	300 W	600 W

PUMP LINE

	PUMP 250	PUMP 500	PUMP 1500	PUMP 4000
MAX FOG EMISSION IN A SINGLE SHOT	250 m ³	500 m ³	1500 m ³	4000 m ³
MAX SECONDS IN A SINGLE SHOT	30 sec	30 sec	70 sec	180 sec.
TOTAL EMISSION WITH FULL FOG BAGS	1500 m ³	1500 m ³	1500 m ³	6000 m ³
CYLINDERS OR PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP
FOG TANK CAPACITY	1 L PLASTIC BAG	1 L PLASTIC BAG	1 L PLASTIC BAG	4 L PLASTIC BAG
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 H	ABOUT 2 H	ABOUT 2,5 H	5 H
HEATING TIME	ABOUT 70 min.	ABOUT 70 min.	ABOUT 2 H	8 H
VERTICAL MOUNTING	YES	YES	YES	YES
HORIZONTAL MOUNTING	YES	YES	OPT.	NO
SERIAL PORT FOR BUS	YES	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	42 W	60 W	80 W
BACK UP BATTERY	2 Ah	2 Ah	2 Ah	2 Ah
ELECTRONIC BOARD	PLUS	PLUS	PLUS	PLUS
CABINET TYPE	PRO	PRO	PRO	PRO
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES	YES
HEATER CARTDRIGE	300 W	300 W	600 W	600 W

PRO PLUS LINE

	FAST 03 1C PRO PLUS	FAST 03 2C PRO PLUS	FAST 02 2C PRO PLUS	FAST 01 2C PRO PLUS
MAX FOG EMISSION IN A SINGLE SHOT	200 m ³	200 m ³	400 m ³	1200 m ³
MAX SECONDS IN A SINGLE SHOT	15 sec	15 sec	25 sec	70 sec
TOTAL EMISSION WITH FULL FOG TANKS	900 m ³	1800 m ³	1800 m ³	1800 m ³
CYLINDERS OR PUMP	1 CYLINDER	2 CYLINDERS	2 CYLINDERS	2 CYLINDERS
FOG TANK CAPACITY	600 ml	600 ml	600 ml	600 ml
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 H	ABOUT 2 H	ABOUT 2 H	ABOUT 2,5 H
HEATING TIME	ABOUT 70 min.	ABOUT 70 min.	ABOUT 90 min.	ABOUT 2 H
VERTICAL MOUNTING	YES	YES	YES	YES
HORIZONTAL MOUNTING	YES	YES	YES	OPT.
SERIAL PORT FOR BUS	YES	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	37 W	42 W	60 W
BACK UP BATTERY	2 Ah	2 Ah	2 Ah	2 Ah
ELECTRONIC BOARD	PLUS	PLUS	PLUS	PLUS
CABINET TYPE	PRO	PRO	PRO	PRO
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES	YES
HEATER CARTRIDGE	300 W	300 W	300 W	600 W

SIMPLE

	SIMPLE 250	SIMPLE 500	SIMPLE 1500
MAX FOG EMISSION IN A SINGLE SHOT	250 m ³	500 m ³	1500 m ³
MAX SECONDS IN A SINGLE SHOT	30 sec	30 sec	70 sec
TOTAL EMISSION WITH FULL FOG TANKS	1500 m ³	1500 m ³	1500 m ³
CYLINDERS OR PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP
FOG TANK CAPACITY	1 L PLASTIC BAG	1 L PLASTIC BAG	1 L PLASTIC BAG
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 H	ABOUT 2 H	ABOUT 2,5 H
HEATING TIME	ABOUT 70 min.	ABOUT 70 min.	ABOUT 2 H
VERTICAL MOUNTING	YES	YES	YES
HORIZONTAL MOUNTING	YES	YES	OPT.
SERIAL PORT FOR BUS	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	42 W	60 W
BACK UP BATTERY	2 Ah	2 Ah	2 Ah
ELECTRONIC BOARD	PLUS	PLUS	PLUS
CABINET TYPE	PRO	PRO	PRO
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES
HEATER CARTRIDGE	300 W	300 W	600 W
Double technology sensor, on/off key, remote control siren	YES	YES	YES

TECHNICAL LIST

ELLIPSE LINE

	ELLIPSE 250	ELLIPSE 500
MAX FOG EMISSION IN A SINGLE SHOT	250 m ³	500 m ³
MAX SECONDS IN A SINGLE SHOT	30 sec	30 sec
TOTAL EMISSION WITH FULL FOG BAGS	1500 m ³	1500 m ³
CYLINDERS OR PUMP	FOG STORM PUMP	FOG STORM PUMP
FOG TANK CAPACITY	1 L PLASTIC BAG	1 L PLASTIC BAG
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 H	ABOUT 2 H
HEATING TIME	ABOUT 70 min.	ABOUT 70 min.
VERTICAL MOUNTING	YES	YES
HORIZONTAL MOUNTING	YES	YES
SERIAL PORT FOR BUS	YES	YES
AVERAGE POWER CONSUMPTION	37 W	42 W
BACK UP BATTERY	2 Ah	2 Ah
ELECTRONIC BOARD	PLUS	PLUS
CABINET TYPE	ELLIPSE	ELLIPSE
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES
HEATER CARTRIDGE	300 W	300 W

MODULAR

	MODULAR 200	MODULAR 300	MODULAR 400	MODULAR 500	MODULAR 800
MAX FOG EMISSION IN A SINGLE SHOT	200 m ³	300 m ³	400 m ³	500 m ³	800 m ³
MAX SECONDS IN A SINGLE SHOT	28 sec.	40 sec.	46 sec.	48 sec.	69 sec.
TOTAL EMISSION WITH FULL FOG TANKS	850 m ³	850 m ³	1275 m ³	1275 m ³	1700 m ³
CYLINDERS OR PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP
FOG TANK CAPACITY	500 ml	500 ml	750 ml	750 ml	1000 ml
WORKING TIME WITHOUT MAINS POWER	OVER 1 hour	OVER 1 hour	OVER 1 hour	OVER 1 hour	OVER 1 hour
HEATING TIME	OVER 1 hour	OVER 1 hour	OVER 2 hours	OVER 2 hours	OVER 2 hours
VERTICAL MOUNTING	YES	YES	YES	YES	YES
HORIZONTAL MOUNTING	YES	YES	YES	YES	YES
SERIAL PORT FOR BUS	YES	YES	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	37 W	48 W	48 W	48 W
BACK UP BATTERY	2Ah	2Ah	2Ah	2Ah	2Ah
ELECTRONIC BOARD	BASE	BASE	BASE	BASE	BASE
CABINET TYPE	PLASTIC	PLASTIC	PLASTIC	PLASTIC	PLASTIC
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES	YES	YES
HEATER CARTRIDGE	170 W	170 W	280 W	280 W	280 W

MODULAR C PLUS

	MODULAR 200 C PLUS	MODULAR 300 C PLUS	MODULAR 400 C PLUS	MODULAR 500 C PLUS	MODULAR 800 C PLUS
MAX FOG EMISSION IN A SINGLE SHOT	200 m ³	300 m ³	400 m ³	500 m ³	800 m ³
MAX SECONDS IN A SINGLE SHOT	28 sec.	40 sec.	46 sec.	48 sec.	69 sec.
TOTAL EMISSION WITH FULL FOG TANKS	1275 m ³	1275 m ³	1275 m ³	1275 m ³	1700 m ³
CYLINDERS OR PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP	FOG STORM PUMP
FOG TANK CAPACITY	750 ml	750 ml	750 ml	750 ml	1000 ml
WORKING TIME WITHOUT MAINS POWER	OVER 1 hour	OVER 1 hour	OVER 1 hour	OVER 1 hour	OVER 1 hour
HEATING TIME	OVER 1 hour	OVER 1 hour	OVER 2 hours	OVER 2 hours	OVER 2 hours
VERTICAL MOUNTING	YES	YES	YES	YES	YES
HORIZONTAL MOUNTING	YES	YES	YES	YES	YES
SERIAL PORT FOR BUS	YES	YES	YES	YES	YES
AVERAGE POWER CONSUMPTION	37 W	37 W	48 W	48 W	48 W
BACK UP BATTERY	2Ah	2Ah	2Ah	2Ah	2Ah
ELECTRONIC BOARD	CPLUS	CPLUS	CPLUS	CPLUS	CPLUS
CABINET TYPE	PLASTIC	PLASTIC	PLASTIC	PLASTIC	PLASTIC
FOG FLUID CERTIFIED AS NOT DANGEROUS	YES	YES	YES	YES	YES
EUROPEAN STANDARD CERTIFICATIONS	YES	YES	YES	YES	YES
HEATER CARTRIDGE	170 W	170 W	280 W	280 W	280 W

TEMPEST

Fully battery operated

Proprietary technology covered by 2 international patents

Patented self balancing shooting system

About one year without mains power

100 m³ (50 cm visibility) in less than 60 seconds

Single shoot fog refill, easy to replace

Special custom designed, UR FOG battery (non lithium)

Mechanical security system

Real fog and not smoke (not pyrotechnical)

Certified non harmful fog

Compatible with any alarm system

Ideal for wireless alarm integration

OEM version available



FAST LINE

Fog machines able to protect small and large areas as they cover volume spaces from 200 m³ to 1200 m³ based on the model. Cylinder shot technology, professional and really price aggressive line.

m³ 200



FAST 03 EASY 2

m³ 200



FAST 03 1C

m³ 200



FAST 03 2C

m³ 400



FAST 02 2C

m³ 1200



FAST 01 2C

The ideal protection for small and medium areas where the instantaneity of the fog saturation is a key feature. The patented cylinder technology allows the systems to operate even in case of a tampering condition, in particular inside small environments where the fogging security system is easily accessible. The devices interface with any alarm station by sending diagnostic information.



FAST ELECTRONIC BOARD

RECHARGE	VERTICAL HORIZONTAL	LIQUID QUANTITY (ml)	FOG MACHINE MODEL
	VERTICAL	300	FAST 03 EASY 2
	VERTICAL HORIZONTAL	400	FAST 03 1C FAST 03 2C
	VERTICAL HORIZONTAL	500	FAST 02 2C
	VERTICAL HORIZONTAL	600	FAST 01 2C



BATTERY PACK



ADJUSTABLE NOZZLE



EASY TO CHANGE CYLINDER

m³ 200



FAST 03 EASY 2

It is the ideal fogging system to protect small or medium areas like shops, homes, garages. The machine shoots the cylinder content in two times, then you just replace it with a new one in a very easy way. Each shot covers 200 m³ in 15 seconds. The price of Fast 03 Easy 2 is the most aggressive in the market but its performances are comparable to a top professional machine as speed of fog ejection.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL OR CORNER MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 10 KG
ABOUT 11 KG
36
26,5X23,0XH34,5
32,0X25,0XH43,0
WHITE
ABOUT 2 HOURS
ABOUT 70 MINUTES
YES
NO
YES
NO
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED

YES
UP TO 300 m³
UP TO 200 m³
15 sec
400 m³
1
1x 300 ml
2 SHOTS (200 m³ EACH)
VERTICAL
1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BATTERY PACK
ANTIROBBERY KIT
WIRED INPUTS ARMING AND SHOOTING
WIRED OUTPUTS
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
37 W
YES
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 200 m³ each shot.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Removable and disposable fog cylinder, very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



m³ 200



FAST 03 1C

It is the ideal fogging system to protect small and medium areas like shops, homes, bank ATM machines. It is the entry level of the professional line, shoots up to 200 m³ of dense fog in 15 seconds. It is equipped with a single cylinder and the shooting time can be set in seconds. It is very fast and competitive.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL OR CORNER MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 10 KG
ABOUT 11 KG
36
26,5X23,0XH34,5
32,0X25,0XH43,0
WHITE
ABOUT 2 HOURS
ABOUT 70 MINUTES
YES
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED

YES
UP TO 300 m³
UP TO 200 m³
15 sec
600 m³
1
1 x 400 ml
PROGRAMMABLE IN SECONDS
VERTICAL/HORIZONTAL
1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BATTERY PACK
OPTIONAL DEMO/ANTIROBBERY KIT
WIRED INPUTS ARMING AND SHOOTING
WIRED OUTPUTS
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
37 W
YES
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 200 m³ in 15 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Removable and disposable fog cylinder, very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 200



FAST 03 2C

It is the ideal fogging system to protect small and medium areas like shops, homes, bank ATM machines and generally all professional applications where is needed a top security technology. It is equipped with two cylinders for a very convenient, reliable and redundant shooting, shoots up to 200 m³ of dense fog in 15 seconds. It is very fast and competitive.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 11 KG
WEIGHT WITH PACKAGING	ABOUT 12 KG
UNITS ON ONE PALLET 100X120	36
DIMENSION OF THE MACHINE	26,5X23,0XH34,5
DIMENSION OF THE PACKAGING	32,0X25,0XH43,0
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 HOURS
HEAT UP TIME FROM COLD	ABOUT 70 MINUTES
VERTICAL OR CORNER MOUNTING	YES
HORIZONTAL MOUNTING	YES
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 300 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 200 m ³
MAX SECONDS OF FOG EMISSION	15 sec
MAX FOG EMITTED WITH FULL FOG TANK	1200 m ³
NUMBER OF CYLINDERS	2
FOG TANK CAPACITY	2 x 400 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
CYLINDER MODEL	VERTICAL / HORIZONTAL
CYLINDER INCLUDED	2
DOUBLE FOG TANK ADVANTAGE	YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	37 W
BATTERY PACK	YES
OPTIONAL DEMO/ANTIROBBERY KIT	YES
WIRED INPUTS ARMING AND SHOOTING	YES
WIRED OUTPUTS	YES
STANDARD COMMUNICATION PROTOCOL	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 200 m³ in 15 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Removable and disposable fog cylinder, very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



m³ 400



FAST 02 2C

It is the ideal fogging system to protect medium areas like large shops, homes, and generally all professional applications where a top security technology is needed. It is equipped with two cylinders for a very convenient, reliable and redundant shooting, shoots up to 400 m³ of dense fog in 25 seconds. It is very fast and competitive.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 15 KG
WEIGHT WITH PACKAGING	ABOUT 18 KG
UNITS ON ONE PALLET 100X120	27
DIMENSION OF THE MACHINE	30,5X23,0XH39,0
DIMENSION OF THE PACKAGING	37,0X25,0XH47,0
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 HOURS
HEAT UP TIME FROM COLD	ABOUT 90 MINUTES
VERTICAL OR CORNER MOUNTING	YES
HORIZONTAL MOUNTING	YES
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 600 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 400 m ³
MAX SECONDS OF FOG EMISSION	25 sec
MAX FOG EMITTED WITH FULL FOG TANK	1500 m ³
NUMBER OF CYLINDERS	2
FOG TANK CAPACITY	2 x 500 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
CYLINDER MODEL	VERTICAL / HORIZONTAL
CYLINDER INCLUDED	2
DOUBLE FOG TANK ADVANTAGE	YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	42 W
BATTERY PACK	YES
OPTIONAL DEMO/ANTIROBBERY KIT	YES
WIRED INPUTS ARMING AND SHOOTING	YES
WIRED OUTPUTS	YES
STANDARD COMMUNICATION PROTOCOL	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 400 m³ in 25 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Patented double fog cylinder is the best solution to shoot fog, tanks are easy to change and disposable. When the first cylinder is empty the machine switches automatically to the second one even during the same shot.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



Another exclusive, patented and very useful plus that allows to detect automatically if the nozzle is tampered and sends an advise signal.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 1200



FAST 01 2C

It is the most powerful machine in the market, ideal to protect large areas like big shops, warehouses, superstores or even to protect targets in open space. Shoots 1200 m³ of dense fog in 70 seconds. It is equipped with two removable fog cylinders.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL/USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 22 KG
ABOUT 25 KG
12
30,0X35,0XH43,0
51,0X39,0XH52,5
WHITE
OVER 2,5 HOURS
ABOUT 2 HOURS
YES
OPT.
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED
DOUBLE FOG TANK ADVANTAGE

YES
UP TO 1800 m³
UP TO 1200 m³
70 sec
1800 m³
2
2 x 600 ml
PROGRAMMABLE IN SECONDS
VERTICAL / HORIZONTAL
2
YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BATTERY PACK
ANTIROBBERY KIT
WIRED INPUTS ARMING AND SHOOTING
WIRED OUTPUTS
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
60 W
YES
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 1200 m³ in 70 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Patented double fog cylinder is the best solution to shoot fog, tanks are easy to change and disposable. When the first cylinder is empty the machine switches automatically to the second one even during the same shot.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



Another exclusive, patented and very useful plus that allows to detect automatically if the nozzle is tampered and sends an advise signal.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



PRO PLUS LINE

New generation machines with cylinder technology. Powerful and fast, they are able to protect small and large areas as they cover volume spaces from 200 m³ to 1200 m³ based on the model.

PRO cabinet with 600 ml cylinders, resistant to vibrations. It includes power supply and 2 Ah battery.

m³ 1200

m³ 400

m³ 200

FAST 01 2C PRO PLUS

FAST 02 2C PRO PLUS



FAST 03 2C PRO PLUS

FAST 03 1C PRO PLUS



PLUS ELECTRONIC BOARD

The professional line with the cylinder technology. Advanced plus board with 3 inputs, 4 outputs and a rechargeable 2 Ah battery (not included), stronger cabinet.

RECHARGE	VERTICAL HORIZONTAL	LIQUID QUANTITY (ml)	FOG MACHINE MODEL
	VERTICAL	600	Fast 03 1C PRO PLUS Fast 03 2C PRO PLUS Fast 02 2C PRO PLUS Fast 01 2C PRO PLUS
	HORIZONTAL	600	Fast 03 1C PRO PLUS Fast 03 2C PRO PLUS Fast 02 2C PRO PLUS Fast 01 2C PRO PLUS



ADJUSTABLE NOZZLE



POWER SUPPLY AND
2Ah BATTERY INSTALLED
IN PRO PLUS FOGGING
SYSTEMS
(BATTERY NOT INCLUDED)



DOUBLE CYLINDER
PATENTED TECHNOLOGY



m³ 200



FAST 03 1C PRO PLUS

It is the ideal fogging system to protect small volume spaces, shops, homes and generally all professional applications where top security technology is needed. It is equipped with one cylinder for a very convenient, reliable and redundant shooting, shoots up to 200 m³ of dense fog in 15 seconds. It is very fast and competitive. It is prearranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 13 KG
ABOUT 14 KG
24
21,5X27,0XH43,5
25,0X37,0XH47,0
WHITE
ABOUT 2 HOURS
ABOUT 70 MINUTES
YES
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED

YES
UP TO 300 m³
UP TO 200 m³
15 sec
900 m³
1
1 x 600 ml
PROGRAMMABLE IN SECONDS
VERTICAL / HORIZONTAL
1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BACK UP BATTERY
OPTIONAL DEMO/ANTIROBBERY KIT
INPUTS WIRED ARMING AND SHOOTING
OUTPUTS WIRED
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
37 W
YES
YES
YES
YES
YES

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 200 m³ in 15 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Removable and disposable fog cylinder, very easy to change and with a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.



m³ 200



FAST 03 2C PRO PLUS

It is the ideal fogging system to protect small volume spaces, shops, homes and generally all professional applications where top security technology is needed. It is equipped with two cylinders for a very convenient, reliable and redundant shooting, shoots up to 200 m³ of dense fog in 15 seconds. It is very fast and competitive. It is prearranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 14 KG
ABOUT 15 KG
24
21,5X27,0Xh43,5
25,0X37,0Xh47,0
WHITE
ABOUT 2 HOURS
ABOUT 70 MINUTES
YES
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED
DOUBLE FOG TANK ADVANTAGE

YES
UP TO 300 m³
UP TO 200 m³
15 sec
1800 m³
2
2 x 600 ml
PROGRAMMABLE IN SECONDS
VERTICAL / HORIZONTAL
2
YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BACK UP BATTERY
OPTIONAL DEMO/ANTIROBBERY KIT
INPUTS WIRED ARMING AND SHOOTING
OUTPUTS WIRED
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
37 W
YES
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 200 m³ in 15 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



One of our patent and the best way to emit fog, thanks to the automatic switch between the first and the second cylinder (when the first one is empty). They are disposable and easy to replace.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.

m³ 400

FAST 02 2C PRO PLUS

It is the ideal fogging system to protect medium areas like large shops, homes, and generally all professional applications where top security technology is needed. It is equipped with two cylinders for a very convenient, reliable and redundant shooting, shoots up to 400 m³ of dense fog in 25 seconds. It is very fast and competitive. It is prearranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.



Powerful and fast fogging system, can cover up to 400 m³ in 25 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



One of our patent and the best way to emit fog, thanks to the automatic switch between the first and the second cylinder (when the first one is empty). They are disposable and easy to replace.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 18 KG
ABOUT 20 KG
24
21,5X27,0XH43,5
25,0X37,0XH47,0
WHITE
ABOUT 2 HOURS
ABOUT 90 MINUTES
YES
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FOG TANK
NUMBER OF CYLINDERS
FOG TANK CAPACITY
SHOOTING SPECIFICATION
CYLINDER MODEL
CYLINDER INCLUDED
DOUBLE FOG TANK ADVANTAGE

YES
UP TO 600 m³
UP TO 400 m³
25 sec
1800 m³
2
2 x 600 ml
PROGRAMMABLE IN SECONDS
VERTICAL / HORIZONTAL
2
YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
BACK UP BATTERY
OPTIONAL DEMO/ANTIROBBERY KIT
INPUTS WIRED ARMING AND SHOOTING
OUTPUTS WIRED
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
42 W
YES
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



m³ 1200



FAST 01 2C PRO PLUS

It is the most powerful machine in the market, ideal to protect large areas like big shops, warehouses, superstores or even to protect targets in open space. Shoots 1200 m³ of dense fog in 70 seconds. It is equipped with two removable fog cylinders. It is prearranged to an easy wall installation and it has a side compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
 WEIGHT WITH PACKAGING
 UNITS ON ONE PALLET 100X120
 DIMENSION OF THE MACHINE
 DIMENSION OF THE PACKAGING
 COLORS
 WORKING TIME WITHOUT MAINS POWER
 HEAT UP TIME FROM COLD
 VERTICAL MOUNTING
 HORIZONTAL MOUNTING
 SERIAL USB PORT FOR MONITORING
 NOZZLE TAMPER
 SERIAL BUS FOR STANDARD PROTOCOL
 ALARM KIT

ABOUT 29 KG
 ABOUT 31 KG
 12
 28,5x36,0xh43,5
 39,0X51,0XH51,0
 WHITE
 MORE THAN 2,5 HOURS
 ABOUT 2 HOURS
 YES
 OPT.
 YES
 YES
 YES
 OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
 COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
 COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
 MAX SECONDS OF FOG EMISSION
 MAX FOG EMITTED WITH FULL FOG TANK
 NUMBER OF CYLINDERS
 FOG TANK CAPACITY
 SHOOTING SPECIFICATION
 CYLINDER MODEL
 CYLINDER INCLUDED
 DOUBLE FOG TANK ADVANTAGE

YES
 UP TO 1800 m³
 UP TO 1200 m³
 70 sec
 1800 m³
 2
 2 x 600 ml
 PROGRAMMABLE IN SECONDS
 VERTICAL / HORIZONTAL
 2
 YES

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
 AVERAGE POWER CONSUMPTION
 BACK UP BATTERY
 OPTIONAL DEMO/ANTIROBBERY KIT
 INPUTS WIRED ARMING AND SHOOTING
 OUTPUTS WIRED
 STANDARD COMMUNICATION PROTOCOL

230V or 110V
 60 W
 YES
 YES
 YES
 YES
 YES

COMPLIES WITH EUROPEAN CE
 FOG FLUID IS CERTIFIED
 MEETS EUROPEAN STANDARD

YES
 YES
 YES



Powerful and fast fogging system, can cover up to 1200 m³ in 70 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



One of our patent and the best way to emit fog, thanks to the automatic switch between the first and the second cylinder (when the first one is empty). They are disposable and easy to replace.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.



PUMP LINE

The new generation of PUMP machines uses the patented high pressure FOG STORM pump and the "LAYER" technology for heating exchange systems. Powerful and fast, they are able to cover volumes from 250 m³ to 4000 m³, depending on the model chosen.

m³ 250



FAST 250 PUMP PRO PLUS

m³ 500



FAST 500 PUMP PRO PLUS

m³ 1500



FAST 1500 PUMP PRO PLUS

m³ 4000



FAST 4000 PUMP PRO PLUS



EXPANSION
KIT 3L
FOR 250-500



EXPANSION
KIT 4L
FOR 1500

The Fog Storm pump, specifically designed for glycol-based fluids, gives the PUMP line the unique flexibility needed to quickly safeguard small, medium and large volumes, up to 4000 m³. The models are equipped with security cabinets and an advanced electronic with 3 inputs and 4 outputs which recharges a standard 2 Ah battery (not included).



PLUS
ELECTRONIC
BOARD



NEW
FOG STORM
PUMP





ADJUSTABLE
NOZZLE



POWER SUPPLY AND
2Ah BATTERY INSTALLED
IN PUMP PRO PLUS
FOGGING SYSTEMS
(BATTERY NOT INCLUDED)



RECHARGE	VERTICAL HORIZONTAL	LIQUID QUANTITY (ml)	FOG MACHINE MODEL
	VERTICAL HORIZONTAL	1000	Fast 250 PUMP PRO PLUS Fast 500 PUMP PRO PLUS Fast 1500 PUMP PRO PLUS
	VERTICAL	3000 4000	Fast 250-500 PUMP PRO PLUS (WITH TOP BOX) Fast 4000 PUMP PRO PLUS Fast 1500 PUMP PRO PLUS (WITH TOP BOX)



m³ 250



FAST 250 PUMP PRO PLUS

It is the ideal fogging system to protect small /medium areas like shops, homes, garages. When the machine is triggered it shoots for the seconds set, when the bag is empty you just replace it with a new one in a very easy way. The fluid bag covers 250 m³ in 30 seconds. It is prearranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 14 KG
WEIGHT WITH PACKAGING	ABOUT 15 KG
UNITS ON ONE PALLET 100X120	24
DIMENSION OF THE MACHINE	21,5X27,0XH43,5
DIMENSION OF THE PACKAGING	26,0X38,0XH53,0
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 HOURS
HEAT UP TIME FROM COLD	ABOUT 70 MINUTES
VERTICAL MOUNTING	YES
HORIZONTAL MOUNTING	YES
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 350 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 250 m ³
MAX SECONDS OF FOG EMISSION	30 sec
MAX FOG EMITTED WITH FULL FOG BAG	1500 m ³
NUMBER OF BAG	1
FOG TANK CAPACITY	1x 1000 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
BAG INCLUDED	1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	37 W
BACK UP BATTERY	YES
PIR SENSOR VALIDATION INPUT	YES
SHOT CONFIRMATION OUTPUT	YES
POWER SUPPLY	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 250 m³ in 30 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.



m³ 500



FAST 500 PUMP PRO PLUS

It is a powerful and fast fogging system, ideal to protect small and medium areas like shops, homes, bank ATM machines and generally all professional applications where a top security technology is needed. It is equipped with one fog bag for a very convenient, reliable and redundant shooting, shoots up to 500 m³ of dense fog in 30 seconds. It is prearranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 16 KG
WEIGHT WITH PACKAGING	ABOUT 17 KG
UNITS ON ONE PALLET 100X120	24
DIMENSION OF THE MACHINE	21,5X27,0XH43,5
DIMENSION OF THE PACKAGING	26,0X38,0XH53,0
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 HOURS
HEAT UP TIME FROM COLD	ABOUT 70 MINUTES
VERTICAL MOUNTING	YES
HORIZONTAL MOUNTING	YES
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 750 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 500 m ³
MAX SECONDS OF FOG EMISSION	30 sec
MAX FOG EMITTED WITH FULL FOG BAG	1500 m ³
NUMBER OF BAG	1
FOG TANK CAPACITY	1 x 1000 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
BAG INCLUDED	1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	42 W
BACK UP BATTERY	YES
PIR SENSOR VALIDATION INPUT	YES
SHOT CONFIRMATION OUTPUT	YES
POWER SUPPLY	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 500 m³ in 30 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Disposable recharge, very easy to replace, at a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



Another exclusive, patented and very useful plus that allows to detect automatically if the nozzle is tampered and sends an advise signal.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





m³ 1500



FAST 1500 PUMP PRO PLUS

It is a powerful and fast fogging system, ideal to protect large areas like big shops, warehouses, superstores or even to protect targets in open space. It is equipped with one fog bag for a very convenient, reliable and redundant shooting, shoots up to 1500 m³ of dense fog in 70 seconds. It is prearranged to an easy wall installation and it has a side compartment to equip boards or accessories if needed.



Powerful and fast fogging system, can cover up to 1500 m³ in 70 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 29 KG
WEIGHT WITH PACKAGING	ABOUT 31 KG
UNITS ON ONE PALLET 100X120	12
DIMENSION OF THE MACHINE	28,5X36,0XH43,5
DIMENSION OF THE PACKAGING	39,0X51,0XH52,5
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	OVER 2,5 HOURS
HEAT UP TIME FROM COLD	ABOUT 2 HOURS
VERTICAL MOUNTING	YES
HORIZONTAL MOUNTING	OPT.
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 2000 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 1500 m ³
MAX SECONDS OF FOG EMISSION	70 sec
MAX FOG EMITTED WITH FULL FOG BAG	1500 m ³
NUMBER OF BAG	1
FOG TANK CAPACITY	1 x 1000 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
BAG INCLUDED	1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	60 W
BACK UP BATTERY	YES
PIR SENSOR VALIDATION INPUT	YES
SHOT CONFIRMATION OUTPUT	YES
POWER SUPPLY	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



m³ 4000



FAST 4000 PUMP PRO PLUS

It is a powerful and fast fogging system, ideal to protect large areas like big shops, warehouses, superstores or even to protect targets in open space. It is equipped with one fog bag for a very convenient, reliable and redundant shooting, shoots up to 4000 m³ of dense fog in 3 minutes. It is prearranged to an easy wall installation (bracket included) and it has a side compartment to equip boards or accessories if needed.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 59 KG
WEIGHT WITH PACKAGING	ABOUT 63 KG
UNITS ON ONE PALLET 100X120	4
DIMENSION OF THE MACHINE	30,5X44,0XH43,5
DIMENSION OF THE PACKAGING	49,0X61,0XH62,5
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 5 HOURS
HEAT UP TIME FROM COLD	ABOUT 8 HOURS
VERTICAL MOUNTING	YES, BRACKET INCLUDED
HORIZONTAL	NO
SERIAL USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 6000 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 4000 m ³
MAX SECONDS OF FOG EMISSION	180 sec.
MAX FOG EMITTED WITH FULL FOG BAG	6000 m ³
NUMBER OF BAG	1
FOG TANK CAPACITY	1 x 4000 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
BAG INCLUDED	1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	80 W
BACK UP BATTERY	YES
PIR SENSOR VALIDATION INPUT	YES
SHOT CONFIRMATION OUTPUT	YES
POWER SUPPLY	YES

STANDARDS


COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 4000 m³ in 180 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



Disposable recharge, very easy to replace, at a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



Another exclusive, patented and very useful plus that allows to detect automatically if the nozzle is tampered and sends an advise signal.




A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





SIMPLE LINE

Plug-and-play PUMP line. Simple and effective, it ensures the immediate protection of small and medium areas.



SIMPLE 250



SIMPLE 500



SIMPLE 1500

Simple is the plug-and-play product line of fogging systems with wireless double technology PIR and all the power of UR FOG. Just connect the mains power and the machine is ready to protect your valuables. You can easily move to any different location.



ON/OFF KEY



REMOTE CONTROL



SIREN



SENSOR



**Connect the mains power,
press the remote button and you're
protected. *SIMPLE!***



m³ 250



FAST 250 PUMP SIMPLE

SIMPLE fogging systems are equipped with a siren, a double technology PIR sensor and a receiver with 2 remote controllers that make the system independent, with no need of a central alarm or installation. Simply connect the unit to the mains power to ensure an immediate protection up to 1500 m³. Technical features of those systems are equivalent to the standard model, providing a line for customers who need a more flexible unit. Those systems are all provided with a protection key and shooting time is settable in seconds.

The arming/disarming condition is identified by a clear and distinct sound signal.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE

WEIGHT WITH PACKAGING

UNITS ON ONE PALLET 100X120

DIMENSION OF THE MACHINE

DIMENSION OF THE PACKAGING

COLOR

WORKING TIME WITHOUT MAINS POWER

HEAT UP TIME FROM COLD

VERTICAL MOUNTING

HORIZONTAL MOUNTING

SERIAL USB PORT FOR MONITORING

NOZZLE TAMPER

SERIAL BUS FOR STANDARD PROTOCOL

ALARM KIT (siren, PIR, keyfob+receiver)

ABOUT 14 KG

ABOUT 15 KG

27

21,5X27,0XH43,5

26,0X38,0XH53,0

WHITE

ABOUT 2 HOURS

ABOUT 70 MINUTES

YES

YES

YES

YES

YES

YES

FOG GENERATOR

NEW HEATING SYSTEM PLUS

MAX FOG SINGLE SHOT (1,5 M VISIBILITY)

MAX FOG SINGLE SHOT (RECOMMENDED DENSITY)

MAX SECONDS OF FOG EMISSION

MAX FOG EMITTED WITH FULL FLUID BAG

NUMBER OF BAG

FLUID TANK CAPACITY

SHOOTING SPECIFICATION

BAG INCLUDED

YES

UP TO 350 m³

UP TO 250 m³

30 sec

1500 m³

1

1x 1000 ml

PROGRAMMABLE IN SECONDS

1

ELECTRICAL SPECIFICATIONS

MAINS POWER

AVERAGE POWER CONSUMPTION

POWER ON/POWER OFF SECURITY KEY

2AH BATTERY

PIR SENSOR SHOOTING INPUT

SHOT CONFIRMATION OUTPUT

POWER SUPPLY

230 V or 110 V

37 W

YES

YES (not included)

YES

YES

YES

STANDARDS

COMPLIES WITH EUROPEAN CE

FOG FLUID IS CERTIFIED

MEETS EUROPEAN STANDARD

YES

YES

YES



Powerful and fast fogging system, can cover up to 250 m³ in 30 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





m³ 500



FAST 500 PUMP SIMPLE

SIMPLE fogging systems are equipped with a siren, a double technology PIR sensor and a receiver with 2 remote controllers that make the system independent, with no need of a central alarm or installation. Simply connect the unit to the mains power to ensure an immediate protection up to 1500 m³. Technical features of those systems are equivalent to the standard model, providing a line for customers who need a more flexible unit. Those systems are all provided with a protection key and shooting time is settable in seconds.

The arming/disarming condition is identified by a clear and distinct sound signal.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE

ABOUT 16 KG

WEIGHT WITH PACKAGING

ABOUT 17 KG

UNITS ON ONE PALLET 100X120

27

DIMENSION OF THE MACHINE

21,5X27,0XH43,5

DIMENSION OF THE PACKAGING

26,0X38,0XH53,0

COLOR

WHITE

WORKING TIME WITHOUT MAINS POWER

ABOUT 2 HOURS

HEAT UP TIME FROM COLD

ABOUT 70 MINUTES

VERTICAL MOUNTING

YES

HORIZONTAL MOUNTING

YES

SERIAL USB PORT FOR MONITORING

YES

NOZZLE TAMPER

YES

SERIAL BUS FOR STANDARD PROTOCOL

YES

ALARM KIT (siren, PIR, keyfob+receiver)

YES

FOG GENERATOR

NEW HEATING SYSTEM PLUS

YES

MAX FOG SINGLE SHOT (1,5 M VISIBILITY)

UP TO 750 m³

MAX FOG SINGLE SHOT (RECOMMENDED DENSITY)

UP TO 500 m³

MAX SECONDS OF FOG EMISSION

30 sec

MAX FOG EMITTED WITH FULL FLUID BAG

1500 m³

NUMBER OF BAG

1

FLUID TANK CAPACITY

1 x 1000 ml

SHOOTING SPECIFICATION

PROGRAMMABLE IN SECONDS

BAG INCLUDED

1

ELECTRICAL SPECIFICATIONS

MAINS POWER

230 V or 110 V

AVERAGE POWER CONSUMPTION

42 W

POWER ON/POWER OFF SECURITY KEY

YES

2AH BATTERY

YES (not included)

PIR SENSOR SHOOTING INPUT

YES

SHOT CONFIRMATION OUTPUT

YES

POWER SUPPLY

YES

STANDARDS

COMPLIES WITH EUROPEAN CE

YES

FOG FLUID IS CERTIFIED

YES

MEETS EUROPEAN STANDARD

YES



Powerful and fast fogging system, can cover up to 500 m³ in 30 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.



m³1500



FAST 1500 PUMP SIMPLE

SIMPLE fogging systems are equipped with a siren, a double technology PIR sensor and a receiver with 2 remote controllers that make the system independent, with no need of a central alarm or installation. Simply connect the unit to the mains power to ensure an immediate protection up to 1500 m³. Technical features of those systems are equivalent to the standard model, providing a line for customers who need a more flexible unit. Those systems are all provided with a protection key and shooting time is settable in seconds.

The arming/disarming condition is identified by a clear and distinct sound signal.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT (siren, PIR, keyfob+receiver)

ABOUT 29 KG
ABOUT 31 KG
12
28,5X36,0XH43,5
39,0X51,0XH52,5
WHITE
OVER 2,5 HOURS
ABOUT 2 HOURS
YES
OPZ.
YES
YES
YES
YES

FOG GENERATOR

NEW HEATING SYSTEM PLUS
MAX FOG SINGLE SHOT (1,5 M VISIBILITY)
MAX FOG SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG EMISSION
MAX FOG EMITTED WITH FULL FLUID BAG
NUMBER OF BAG
FLUID TANK CAPACITY
SHOOTING SPECIFICATION
BAG INCLUDED

YES
UP TO 2000 m³
UP TO 1500 m³
70 sec
1500 m³
1
1 x 1000 ml
PROGRAMMABLE IN SECONDS
1

ELECTRICAL SPECIFICATIONS

MAINS POWER
AVERAGE POWER CONSUMPTION
POWER ON/POWER OFF SECURITY KEY
2AH BATTERY
PIR SENSOR SHOOTING INPUT
SHOT CONFIRMATION OUTPUT
POWER SUPPLY

230 V or 110 V
60 W
YES
YES (not included)
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 1500 m³ in 70 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





ELLIPSE LINE

Combines the features of the Pump line with a pleasant design and small size.

m³ 500



ELLIPSE 500 PUMP PRO PLUS

m³ 250



ELLIPSE 250 PUMP PRO PLUS

The ELLIPSE line combines the pump features with a nice design and small size. Line designed for small and medium environments where the aesthetic factor is a fundamental component.



**PLUS
ELECTRONIC
BOARD**



**NEW
FOG STORM
PUMP**




ADJUSTABLE NOZZLE



**POWER SUPPLY AND
2Ah BATTERY INSTALLED
IN ELLIPSE PUMP PRO
PLUS FOGGING SYSTEMS
(BATTERY NOT INCLUDED)**



RECHARGE	VERTICAL HORIZONTAL	LIQUID QUANTITY (ml)	FOG MACHINE MODEL
	VERTICAL HORIZONTAL	1000	Ellipse 250 PUMP PRO PLUS Ellipse 500 PUMP PRO PLUS



m³ 250



ELLIPSE 250 PUMP PRO PLUS

It is a powerful and fast fogging system, ideal to protect small and medium areas like shops, homes, bank ATM machines and generally all professional applications where is needed a top security technology. It is equipped with one fog bag for a very convenient, reliable and redundant shooting, shoots up to 250 m³ of dense fog in 30 seconds. It is prearranged to an easy wall installation.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE	ABOUT 13 KG
WEIGHT WITH PACKAGING	ABOUT 14 KG
UNITS ON ONE PALLET 100X120	12
DIMENSION OF THE MACHINE	41,0X19,5XH43,0
DIMENSION OF THE PACKAGING	52,0X31,0X48,5
COLORS	WHITE
WORKING TIME WITHOUT MAINS POWER	ABOUT 2 HOURS
HEAT UP TIME FROM COLD	ABOUT 70 MINUTES
VERTICAL MOUNTING	YES
HORIZONTAL MOUNTING	YES
SERIAL/USB PORT FOR MONITORING	YES
NOZZLE TAMPER	YES
SERIAL BUS FOR STANDARD PROTOCOL	YES
ALARM KIT	OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS	YES
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)	UP TO 350 m ³
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)	UP TO 250 m ³
MAX SECONDS OF FOG IN A SINGLE SHOT	30 sec
MAX FOG EMISSION WITH FULL FOG BAG	1500 m ³
NUMBER OF FOG BAGS	1
FOG BAG CAPACITY	1 x 1000 ml
SHOOTING SPECIFICATION	PROGRAMMABLE IN SECONDS
FOG BAG INCLUDED	1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY	230 V or 110 V
AVERAGE POWER CONSUMPTION	37 W
2AH BATTERY(NOT INCLUDED)	YES
WIRED INPUTS ARMING AND SHOOTING	YES
WIRED OUTPUTS	YES
STANDARD COMMUNICATION PROTOCOL	YES

STANDARDS

COMPLIES WITH EUROPEAN CE	YES
FOG FLUID IS CERTIFIED	YES
MEETS EUROPEAN STANDARD	YES



Powerful and fast fogging system, can cover up to 250 m³ in 30 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





m³ 500



ELLIPSE 500 PUMP PRO PLUS

It is a powerful and fast fogging system, ideal to protect small and medium areas like shops, homes, bank ATM machines and generally all professional applications where is needed a top security technology. It is equipped with one fog bag for a very convenient, reliable and redundant shooting, shoots up to 500 m³ of dense fog in about 30 seconds. It is prearranged to an easy wall installation.

GENERAL SPECIFICATIONS

WEIGHT OF THE FOG MACHINE
WEIGHT WITH PACKAGING
UNITS ON ONE PALLET 100X120
DIMENSION OF THE MACHINE
DIMENSION OF THE PACKAGING
COLORS
WORKING TIME WITHOUT MAINS POWER
HEAT UP TIME FROM COLD
VERTICAL MOUNTING
HORIZONTAL MOUNTING
SERIAL/USB PORT FOR MONITORING
NOZZLE TAMPER
SERIAL BUS FOR STANDARD PROTOCOL
ALARM KIT

ABOUT 15 KG
ABOUT 16 KG
12
41,0X19,5XH43,0
52,0X31,0X48.5
WHITE
ABOUT 2 HOURS
ABOUT 70 MINUTES
YES
YES
YES
YES
YES
OPTIONAL

FOG GENERATOR

NEW HEATING SYSTEM PLUS
COVERAGE IN A SINGLE SHOT (1,5 M VISIBILITY)
COVERAGE IN A SINGLE SHOT (RECOMMENDED DENSITY)
MAX SECONDS OF FOG IN A SINGLE SHOT
MAX FOG EMISSION WITH FULL FOG BAG
NUMBER OF FOG BAGS
FOG BAG CAPACITY
SHOOTING SPECIFICATION
FOG BAG INCLUDED

YES
UP TO 750 m³
UP TO 500 m³
30 sec
1500 m³
1
1 x 1000 ml
PROGRAMMABLE IN SECONDS
1

ELECTRICAL SPECIFICATIONS

POWER SUPPLY
AVERAGE POWER CONSUMPTION
2AH BATTERY(NOT INCLUDED)
WIRED INPUTS ARMING AND SHOOTING
WIRED OUTPUTS
STANDARD COMMUNICATION PROTOCOL

230 V or 110 V
37 W
YES
YES
YES
YES

STANDARDS

COMPLIES WITH EUROPEAN CE
FOG FLUID IS CERTIFIED
MEETS EUROPEAN STANDARD

YES
YES
YES



Powerful and fast fogging system, can cover up to 500 m³ in 30 seconds.



The innovative formula of the fog fluid has a high percentage of glycol which ensures an extremely dense fog.



Disposable recharge, very easy to replace, at a very competitive price.



The perfect thermal insulation allows to reduce the power consumption and also to save energy.



Exclusive patented system that allows to automatically detects if the nozzle has been obstructed by sending a signal in case of tampering.



A serial bus allows to add additional boards to each UR Fog system for an easier interface with all kinds of alarm centrals.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.




UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.





MODULAR LINE

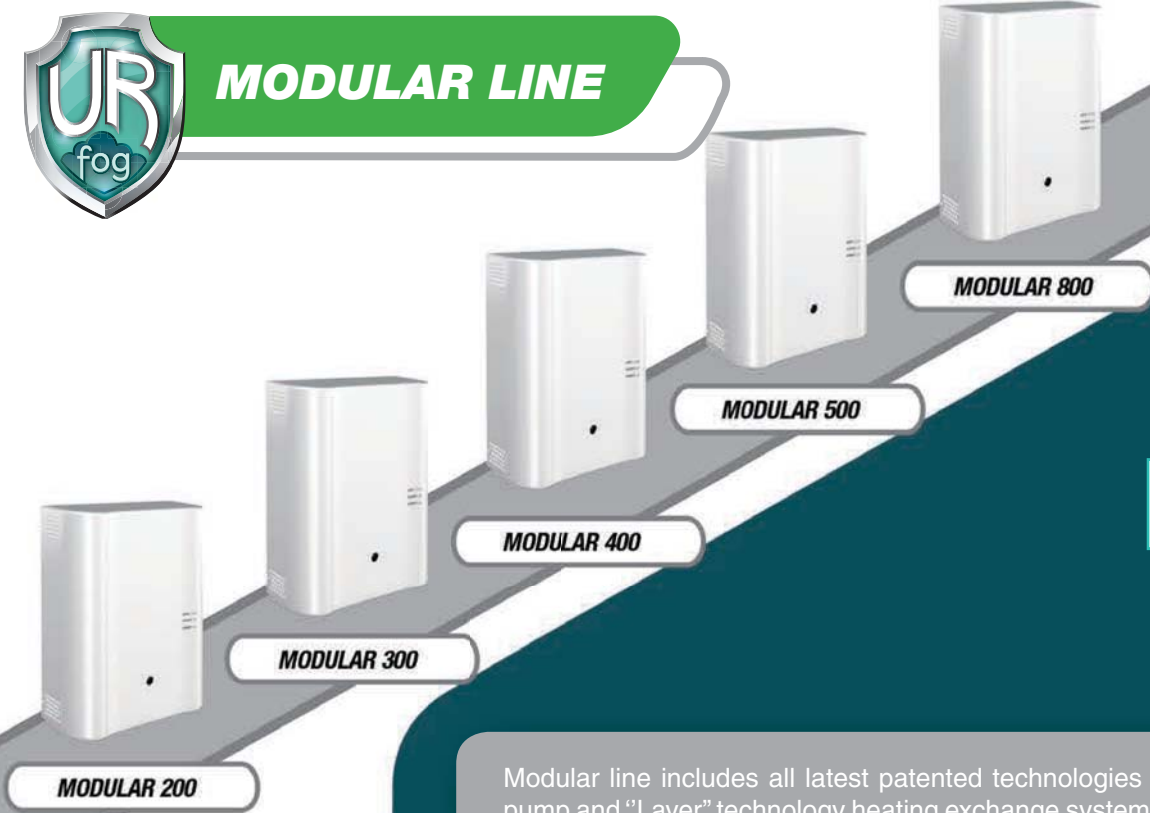

GREEN TECH
FROM 170 W IN
START



Modular line includes all latest patented technologies as Fog Storm mechanical pump and "Layer" technology heating exchange systems for a fast and very dry fog shoot. Small, expandable, easy to install, it needs just 170 W in start for a very low power consumption. Plastic front panel allows wireless communication.



POWER SUPPLY AND
2Ah BATTERY INSTALLED
IN MODULAR
FOGGING SYSTEMS
(BATTERY NOT INCLUDED)



OPTIONAL SIDE AND
TOP RISER

OPTIONAL
DESK STAND



OPTIONAL
ORIENTABLE
WALL
BRACKET



m³ 200

GREEN TECH
170 W IN START



MODULAR 200

Modular is the small, powerful and flexible fogging system that includes all fastest technologies. Despite the small dimension, it is possible to insert optional boards (such as alarm centrals, sensors, etc.) in allocated areas. The outer cabinet is made of plastic material to ease the wireless communication between the internally installed devices and the outside. The new layer heater, engineered and patented by UR Fog, ensures leader market performances and keeps low weight and overall dimensions.

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	7,5 KG
- OVERALL PACKAGING WEIGHT	8,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 1 HOUR
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (1,5 M VISIBILITY)	300 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	200 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	28 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	850 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	500 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 2 CABLED INPUTS: ARMING AND SHOOTING	YES
- 1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY, SYSTEM FAILURE)	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY WIRELESS COMMUNICATION	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	37 W
- HEATER MAX POWER IN START	170 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 200 m³ in 28 seconds.




The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 300

GREEN TECH
170 W IN START



MODULAR 300

Modular is the small, powerful and flexible fogging system that includes all fastest technologies. Despite the small dimension, it is possible to insert optional boards (such as alarm centrals, sensors, etc.) in allocated areas. The outer cabinet is made of plastic material to ease the wireless communication between the internally installed devices and the outside. The new layer heater, engineered and patented by UR Fog, ensures leader market performances and keeps low weight and overall dimensions.



Powerful and fast fogging system, can cover up to 300 m³ in 40 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	8 KG
- OVERALL PACKAGING WEIGHT	9 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 1 HOUR
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (1,5 M VISIBILITY)	450 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	300 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	40 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	850 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	500 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 2 CABLED INPUTS: ARMING AND SHOOTING	YES
- 1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY, SYSTEM FAILURE)	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY WIRELESS COMMUNICATION	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	37 W
- HEATER MAX POWER IN START	170 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



m³ 400

GREEN TECH
280 W IN START



MODULAR 400

Modular is the small, powerful and flexible fogging system that includes all fastest technologies. Despite the small dimension, it is possible to insert optional boards (such as alarm centrals, sensors, etc.) in allocated areas. The outer cabinet is made of plastic material to ease the wireless communication between the internally installed devices and the outside. The new layer heater, engineered and patented by UR Fog, ensures leader market performances and keeps low weight and overall dimensions.

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	8,5 KG
- OVERALL PACKAGING WEIGHT	9,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (1,5 M VISIBILITY)	600 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	400 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	46 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 2 CABLED INPUTS: ARMING AND SHOOTING	YES
- 1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY, SYSTEM FAILURE)	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY WIRELESS COMMUNICATION	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 400 m³ in 46 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 500

GREEN TECH
280 W IN START



MODULAR 500

Modular is the small, powerful and flexible fogging system that includes all fastest technologies. Despite the small dimension, it is possible to insert optional boards (such as alarm centrals, sensors, etc.) in allocated areas. The outer cabinet is made of plastic material to ease the wireless communication between the internally installed devices and the outside. The new layer heater, engineered and patented by UR Fog, ensures leader market performances and keeps low weight and overall dimensions.

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	9 KG
- OVERALL PACKAGING WEIGHT	10 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (1,5 M VISIBILITY)	750 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	500 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	48 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 2 CABLED INPUTS: ARMING AND SHOOTING	YES
- 1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY, SYSTEM FAILURE)	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY WIRELESS COMMUNICATION	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 500 m³ in 48 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR Fog fogging systems are certified according to the European standards, the fog fluid is tested and is absolutely safe for people, animals and objects and doesn't leave any residual.



m³ 800

GREEN TECH
280 W IN START



MODULAR 800

Modular is the small, powerful and flexible fogging system that includes all fastest technologies. Despite the small dimension, it is possible to insert optional boards (such as alarm centrals, sensors, etc.) in allocated areas. The outer cabinet is made of plastic material to ease the wireless communication between the internally installed devices and the outside. The new layer heater, engineered and patented by UR Fog, ensures leader market performances and keeps low weight and overall dimensions.

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	9,5 KG
- OVERALL PACKAGING WEIGHT	10,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (1,5 M VISIBILITY)	1200 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	800 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	69 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1700 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	1000 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 2 CABLED INPUTS: ARMING AND SHOOTING	YES
- 1 CABLED OUTPUT: FAULT (EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY, SYSTEM FAILURE)	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY WIRELESS COMMUNICATION	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 800 m³ in 69 seconds.




The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



MODULAR C PLUS LINE



MODULAR 200 C PLUS



MODULAR 300 C PLUS



MODULAR 400 C PLUS



MODULAR 500 C PLUS




MODULAR 800 C PLUS


GREEN TECH
FROM 170 W IN
START



It combines the technical features of the Modular line with a superior electronic board equipped with 4 wired inputs: arming, shooting, programmable input and verification sensor (PIR), first three accept positive (PNP) or negative (NPN) signals. It is possible to set "active security" or "passive security". Five wired outputs with relay and an internal multislot to add multiple expansion boards at the same time. Plastic front panel to allow wireless communication.

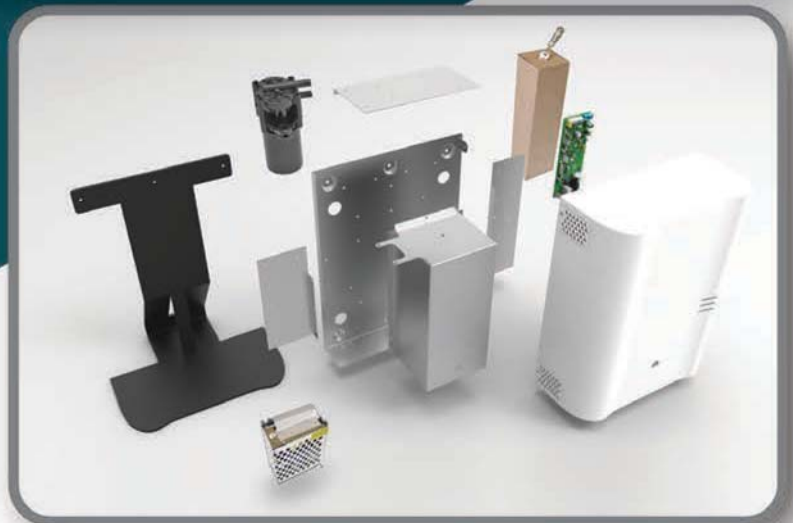

OPTIONAL
DESK STAND



POWER SUPPLY AND
2Ah BATTERY INSTALLED
IN MODULAR C PLUS
FOGGING SYSTEMS
(BATTERY NOT INCLUDED)



OPTIONAL SIDE AND
TOP RISER



OPTIONAL
ORIENTABLE
WALL
BRACKET



m³ 200

GREEN TECH
170 W IN START



MODULAR 200 C PLUS

Small and powerful, expandable and very flexible. Modular 200 C PLUS is equipped with the powerful CPLUS board. Main news are:

- Front panel made of plastic material to simplify wireless communication
- Internal side riser for optional boards
- It accepts positive (PNP) or negative (NPN) signals
- It is possible to set "active security" or "passive security"
- 4 cabled inputs
- 5 cabled relay outputs (free contacts)
- 4 internal slots for optional boards

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	7,5 KG
- OVERALL PACKAGING WEIGHT	8,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 1 HOUR
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (OVER 1,5 M VISIBILITY)	300 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	200 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	28 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 4 CABLED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR). FIRST THREE ACCEPT POSITIVE (PNP) OR NEGATIVE (NPN) SIGNALS. IT IS POSSIBLE TO SET "ACTIVE SECURITY" OR "PASSIVE SECURITY"	YES
- 5 RELAY CABLED OUTPUTS: FAULT, PROGRAMMABLE OUTPUT, EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY AND SHOOTING CONFIRMATION	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY THE WIRELESS COMMUNICATION	YES
- INTERNAL MULTI SLOT TO INSERT MORE EXPANSION BOARDS AT ONCE	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	37 W
- HEATER MAX POWER IN START	170 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 200 m³ in 28 seconds.




The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 300

GREEN TECH
170 W IN START



MODULAR 300 C PLUS

Small and powerful, expandable and very flexible. Modular 300 C PLUS is equipped with the powerful CPLUS board. Main news are:

- Front panel made of plastic material to simplify wireless communication
- Internal side riser for optional boards
- It accepts positive (PNP) or negative (NPN) signals
- It is possible to set "active security" or "passive security"
- 4 cabled inputs
- 5 cabled relay outputs (free contacts)
- 4 internal slots for optional boards

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	8 KG
- OVERALL PACKAGING WEIGHT	9 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 1 HOUR
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (OVER 1,5 M VISIBILITY)	450 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	300 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	40 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 4 CABLED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR). FIRST THREE ACCEPT POSITIVE (PNP) OR NEGATIVE (NPN) SIGNALS. IT IS POSSIBLE TO SET "ACTIVE SECURITY" OR "PASSIVE SECURITY"	YES
- 5 RELAY CABLED OUTPUTS: FAULT, PROGRAMMABLE OUTPUT, EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY AND SHOOTING CONFIRMATION	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY THE WIRELESS COMMUNICATION	YES
- INTERNAL MULTI SLOT TO INSERT MORE EXPANSION BOARDS AT ONCE	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	37 W
- HEATER MAX POWER IN START	170 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 300 m³ in 40 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



m³ 400

GREEN TECH
280 W IN START



MODULAR 400 C PLUS

Small and powerful, expandable and very flexible. Modular 400 C PLUS is equipped with the powerful CPLUS board. Main news are:

- Front panel made of plastic material to simplify wireless communication
- Internal side riser for optional boards
- It accepts positive (PNP) or negative (NPN) signals
- It is possible to set "active security" or "passive security"
- 4 cabled inputs
- 5 cabled relay outputs (free contacts)
- 4 internal slots for optional boards

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	8,5 KG
- OVERALL PACKAGING WEIGHT	9,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (OVER 1,5 M VISIBILITY)	600 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	400 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	46 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 4 CABLED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR). FIRST THREE ACCEPT POSITIVE (PNP) OR NEGATIVE (NPN) SIGNALS. IT IS POSSIBLE TO SET "ACTIVE SECURITY" OR "PASSIVE SECURITY"	YES
- 5 RELAY CABLED OUTPUTS: FAULT, PROGRAMMABLE OUTPUT, EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY AND SHOOTING CONFIRMATION	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY THE WIRELESS COMMUNICATION	YES
- INTERNAL MULTI SLOT TO INSERT MORE EXPANSION BOARDS AT ONCE	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 400 m³ in 46 seconds.




The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.

m³ 500

GREEN TECH
280 W IN START



MODULAR 500 C PLUS

Small and powerful, expandable and very flexible. Modular 500 C PLUS is equipped with the powerful CPLUS board. Main news are:

- Front panel made of plastic material to simplify wireless communication
- Internal side riser for optional boards
- It accepts positive (PNP) or negative (NPN) signals
- It is possible to set "active security" or "passive security"
- 4 cabled inputs
- 5 cabled relay outputs (free contacts)
- 4 internal slots for optional boards

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	9 KG
- OVERALL PACKAGING WEIGHT	10 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (OVER 1,5 M VISIBILITY)	750 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	500 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	48 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1275 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	750 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 4 CABLED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR). FIRST THREE ACCEPT POSITIVE (PNP) OR NEGATIVE (NPN) SIGNALS. IT IS POSSIBLE TO SET "ACTIVE SECURITY" OR "PASSIVE SECURITY"	YES
- 5 RELAY CABLED OUTPUTS: FAULT, PROGRAMMABLE OUTPUT, EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY AND SHOOTING CONFIRMATION	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	YES
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY THE WIRELESS COMMUNICATION	YES
- INTERNAL MULTI SLOT TO INSERT MORE EXPANSION BOARDS AT ONCE	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 500 m³ in 48 seconds.



The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



m³ 800

GREEN TECH
280 W IN START



MODULAR 800 C PLUS

Small and powerful, expandable and very flexible. Modular 800 C PLUS is equipped with the powerful CPLUS board. Main news are:

- Front panel made of plastic material to simplify wireless communication
- Internal side riser for optional boards
- It accepts positive (PNP) or negative (NPN) signals
- It is possible to set "active security" or "passive security"
- 4 cabled inputs
- 5 cabled relay outputs (free contacts)
- 4 internal slots for optional boards

GENERAL SPECIFICATIONS

- COMPACT CABINET	YES
- WEIGHT OF THE FOGGING SYSTEM	9,5 KG
- OVERALL PACKAGING WEIGHT	10,5 KG
- UNIT ON 100X120 PALLET	36
- DIMENSIONS OF THE FOGGING SYSTEM	30 X 13 X 39
- SIZE OF THE PACKAGING	36 X 19 X 45
- COLORS	WHITE
- OPERATING TIME WITHOUT MAINS POWER	OVER 1 HOUR
- HEATING TIME	OVER 2 HOURS
- VERTICAL MOUNTING	YES
- HORIZONTAL MOUNTING	YES
- USB PORT/SERIAL FOR COMPUTER MONITORING (WINDOWS AND LINUX)	YES
- SERIAL BUS FOR STANDARD PROTOCOL	YES
- ALARM KIT	OPT.

FOGGING SYSTEM

- NEW "LAYER" HEATING SYSTEM	YES
- SINGLE SHOT COVERAGE (OVER 1,5 M VISIBILITY)	1200 M ³
- SINGLE SHOT COVERAGE (RECOMMENDED VISIBILITY)	800 M ³
- MAXIMUM EMISSION TIME IN A SINGLE SHOT	69 SEC.
- TOTAL DISCHARGE CAPABILITY WITH FULL BAG	1700 M ³
- NUMBER OF BAGS	1
- AMOUNT OF FLUID IN THE BAG	1000 ML
- SHOT CHARACTERISTICS	PROGRAMMABLE IN SEC
- NUMBER OF BAGS INCLUDED	1
- 4 CABLED INPUTS: ARMING, SHOOTING, PROGRAMMABLE INPUT AND VERIFICATION SENSOR (PIR). FIRST THREE ACCEPT POSITIVE (PNP) OR NEGATIVE (NPN) SIGNALS. IT IS POSSIBLE TO SET "ACTIVE SECURITY" OR "PASSIVE SECURITY"	YES
- 5 RELAY CABLED OUTPUTS: FAULT, PROGRAMMABLE OUTPUT, EMPTY BAG, LOW BATTERY/LACK OF POWER SUPPLY AND SHOOTING CONFIRMATION	YES
- SERIAL INTERFACE RS232	YES
- STANDARD COMMUNICATION PROTOCOL	YES
- TOP INTERNAL RISER FOR OPTIONAL BOARDS	NO
- SIDE INTERNAL RISER OPTIONAL BOARDS	YES
- FRONT PANEL MADE OF PLASTIC MATERIAL TO SIMPLIFY THE WIRELESS COMMUNICATION	YES
- INTERNAL MULTI SLOT TO INSERT MORE EXPANSION BOARDS AT ONCE	YES

ELECTRICAL SPECIFICATIONS

- POWER SUPPLY	220/110 V
- AVERAGE CONSUMPTION	48 W
- HEATER MAX POWER IN START	280 W
- BACKUP BATTERY	YES

STANDARD

- CE CERTIFICATION	YES
- CERTIFIED FOG FLUID	YES
- COMPLIANT TO THE CURRENT EUROPEANS REGULATIONS	YES



Powerful and fast fogging system, can cover up to 800 m³ in 69 seconds.




The densest fog among all the fogging systems thanks to 80% of glycol in its fog fluid and the proprietary shooting technology.



It is very easy to change and with a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature is constantly stable.



It is possible to add optional boards inside the cabinet, such as alarm centrals, sensors, etc.



A unique serial bus to plug on the electronic board an add on card that allows to easily interface the machine with alarms and to control the fogging system even from remote. A standard protocol is available for all machines.



UR FOG fogging systems are innovative in their technology and performances, in order to guarantee the most effective protection against thefts and they have different patents.



UR FOG fogging systems are certified after European regulation. Fog fluid is assessed as not dangerous for people and animals and does not leave residuals.



TEMPEST

- FULLY PATENTED
- BATTERY OPERATED
- VERY SMALL
- VERY COMPETITIVE
- FOG NOT SMOKE

AVAILABLE FROM MAY 2020



Fully battery operated

Proprietary technology covered by 2 international patents

Patented self balancing shooting system

Battery lasts about one year without mains power

100 m3 (50 cm visibility) in less than 60 seconds

Single shoot fog refill easy to replace

Special custom designed UR FOG battery (non lithium)

Mechanical security system

Real fog and not smoke (not pyrotechnical)

Certified non harmful fog

Compatible with any alarm system

Ideal for wireless alarm integration

OEM version available






PRODUCT CODES

	Fast 03 Easy 2	Fast 03 1C	Fast 03 2C	Fast 02 2C	Fast 01 2C	Fast 03 1C Pro Plus	Fast 03 2C Pro Plus	Fast 02 2C PRO Plus	Fast 01 2C Pro Plus	Fast 250 Pump Pro Plus	Fast 500 Pump Pro Plus	Fast 1500 Pump Pro Plus	Fast 4000 Pump Pro Plus	Elipse 250 Pump Pro Plus	Elipse 500 Pump Pro Plus	Fast 250 Simple	Fast 500 Simple	Fast 1500 Simple	CODE
Cylinder 300 ml	●																		FESB2002
Wall metal bracket Fast 03/Easy 2	●	●	●																F03STH
Cylinder 400 ml - vertical		●	●																F3SNBOM
Cylinder 400 ml - horizontal		●	●																F3SNBOMOR
Cylinder 500 ml - vertical				●															F2SNBOM
Cylinder 500 ml - horizontal				●															F2SNBOMOR
Wall metal bracket Fast 02				●															F02STH
Cylinder 600 ml - vertical					●	●	●	●	●										F1M06BOM
Cylinder 600 ml - horizontal					●	●	●	●	●										F1M06BOMORZ
Wall metal bracket Fast 01					●				●			●						●	F01STH
Wall metal bracket Fast Pro Plus						●	●	●		●	●					●	●		F23STHPRO
Bag 1000 ml										●	●	●	●	●	●	●	●	●	FFLXRC10
Bag 4000 ml (Pump 1500 only with top Box)												●	●						FFLXRC40
2 handlers Fast 4000													●						FPUM
Wall metal bracket Ellipse														●	●				FELSTH
Nozzle extension	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	F23PRUG7
3 hole nozzle	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	F1M03UG3
Demo kit		●	●	●	●	●	●	●	●	●	●	●	●	●	●				F23KITD
Antirobbery cable	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	F23KITA
Antirobbery button	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	F23PA
Relay board	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	URRE
Arming key	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				F123KEY
Keyfob + receiver	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				URTR
Additional Keyfob	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	URT
Transceiver rs232 5/12 V	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	URRS232
LAN board with Cloud	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	URCL
LAN WIFI board with Cloud	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	URCLWF
Additional PIR for SIMPLE																●	●	●	URPIRA
Bag 3000 ml										●	●								FFLXRC30
Top box 3000 ml Pump 250-500										●	●								FFLXTP30
Top box 4000 ml Pump 1500												●							FFLXTP40
	F3SN220ES2	F3SN2201C	F3SN2202C	F2SN220	F1M06ITAD	F3SN2201CPRO	F3SN2202CPRO	F2SN2202CPRO	F1SN2202CPRO	FPU250PP	FPU500PP	FPU1500PP	FPU4000PP	FEL250PPP	FEL500PPP	FSSP250	FSSP500	FSSP1500	

	Modular 200	Modular 300	Modular 400	Modular 500	Modular 800	Modular 200 Plus	Modular 300 Plus	Modular 400 Plus	Modular 500 Plus	Modular 800 Plus	Tempest	CODE
Fluid bag 500ml	●	●										FFLXRC2/3
Fluid bag 750ml			●	●		●	●	●	●			FFLXRC4/5
Fluid bag 1000ml					●					●		FFLXRC8
Top cabinet metal riser	●	●	●	●		●	●	●	●			FPUTRCP
Side cabinet metal riser	●	●	●	●	●	●	●	●	●	●		FPUSRCP
Desk stand	●	●	●	●	●	●	●	●	●	●		FPUSTD
Orientable wall bracket	●	●	●	●	●	●	●	●	●	●		FPUWB
LAN WIFI board with Cloud	●	●	●	●	●	●	●	●	●	●		WRCLWF
Liquid cartdridge Tempest											●	FFLXTMCT
Battery recharge Tempest											●	FFLXTMCB
Single battery Tempest											●	FFLXTMBT
	FPU03ESM200	FPU03ESM300	FPU03ESM400	FPU03ESM500	FPU03ESM800	FPU03ESM200P	FPU03ESM300P	FPU03ESM400P	FPU03ESM500P	FPU03ESM800P	FFLXTM	



ADD-ON BOARDS




Relay board

is designed to provide four relay outputs, potentially free.


LAN BOARD WITH CLOUD



Cloud LAN board to monitor fogging machines and diagnostic. Great advantage for all installers that can check from remote if any maintenance is needed.

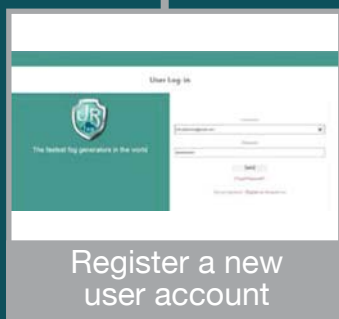

Register a new user account

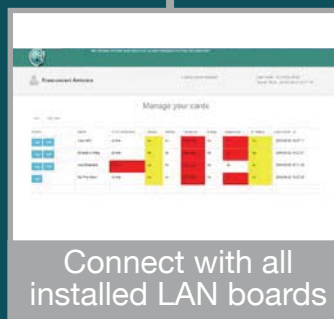

Connect with all installed LAN boards



Check the parameters of all connected machines

WI-FI LAN BOARD WITH CLOUD



WI-FI LAN BOARD

The WIFI LAN board allows wired or wireless Lan connection. Through the extremely secure Cloud service, provided for free, it allows, in addition to the systems monitoring, to remotely activate the controls of arming, shooting and setting in seconds the fogging system.

INDEX:

2 COMPANY PROFILE 3 OUR TEAM 4 WHY FOGGING SYSTEMS 5 TARGETS 6 ROAD MAP 2019/2020 7 CERTIFICATIONS

8 PRODUCT RANGE 9 PRODUCT RANGE 10 PRODUCT RANGE 11 ELECTRONIC BOARDS 12 TECHNICAL LIST 13 TECHNICAL LIST

14 TECHNICAL LIST 15 TECHNICAL LIST 16 FAST LINE 17 FAST 03 EASY 2 18 FAST 03 1C 19 FAST 03 2C

20 FAST 02 2C 21 FAST 01 2C 22 PRO PLUS LINE 23 FAST 03 1C PRO PLUS 24 FAST 03 2C PRO PLUS 25 FAST 02 2C PRO PLUS

26 FAST 01 2C PRO PLUS 27 PUMP LINE 28 FAST 250 PUMP 29 FAST 500 PUMP 30 FAST 1500 PUMP 31 FAST 4000 PUMP

32 SIMPLE LINE 33 FAST 250 SIMPLE 34 FAST 500 SIMPLE 35 FAST 1500 SIMPLE 36 ELLIPSE LINE 37 ELLIPSE 250

38 ELLIPSE 500 39 MODULAR LINE 40 MODULAR 200 41 MODULAR 300 42 MODULAR 400 43 MODULAR 500

44 MODULAR 800 45 MODULAR LINE C PLUS 46 MODULAR 200 C PLUS 47 MODULAR 300 C PLUS 48 MODULAR 400 C PLUS 49 MODULAR 500 C PLUS

50 MODULAR 800 C PLUS 51 TEMPEST 52 PRODUCT CODES 53 PRODUCT CODES 54 ADD-ON BOARDS 55 INDEX



UR FOG S.r.l.

Sede legale / Legal Office : via Giacinto Collegno n°11 - 10143 Torino - Italy

Sede operativa e magazzini / Operation and delivery to : via Toscana n° 38 - 10099 San Mauro T.se (Torino) - Italy

C.F. / P. Iva 10724850010 - Reg. imprese TO - 1157030 - Numero Iscrizione Reg. AEE: IT19050000011412

Numero Iscrizione Reg. Pile Accumulatori IT19100P00005758 Cap. Soc. Euro 10.000 int. versati

Tel. +39 011 0133037 - Fax +39 011 0133005 - e-mail : info@urfog.com

WWW.URFOG.COM